

FORM PTO-1390  
REV. 2/01

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371**

Attorney's Docket Number: 04208.0112  
Customer No.: 22,852

U.S. APPLICATION NO.  
(If known, see 37 CFR 1.5)

**09/869784**

INTERNATIONAL APPLICATION NO.  
PCT/JP00/07762

INTERNATIONAL FILING DATE  
November 2, 2000

PRIORITY DATE CLAIMED  
November 5, 1999

TITLE OF INVENTION

**CARD CONNECTOR**

APPLICANT(S) FOR DO/EO/US

**1) Toshiyasu ITO, 2) Masaaki OYA, 3) Kazutaka TAGUCHI,  
4) Takashi TORII, and 5) Hideki KAWAI**

Applicants herewith submit to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.
4. ☐ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c)(2)).
  - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
  - b. ☒ has been communicated by the International Bureau.
  - c. ☐ is not required, as the application was filed with the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371 (c)(2)).
  - a. ☒ is attached hereto.
  - b. ☐ has been previously submitted under 35 U.S.C. 154 (d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3)).
  - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ have been communicated by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☐ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

**Items 11 to 20 below concern document(s) or information included:**

11. ☒ Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ Assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 & 3.31 is included.
13. ☐ A **FIRST** preliminary amendment.
14. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
15. ☐ A Substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821-1.825.
18. ☐ A second copy of the published international application under 35 U.S.C. 154 (d)(4).
19. ☐ A second copy of the English language translation of the international application 35 U.S.C. 154 (d)(4).
20. ☒ Other items or information:
  - a. ☒ Copy of cover page of International Publication No. WO 01/35333.
  - b. ☐ Copy of Notification of Missing Requirements.
  - c. ☒ Verification of Translation.

U.S. APPLICATION NO. **09/869784** (if known, see 37 CFR 1.5)

INTERNATIONAL APPLICATION NO.: PCT/JP00/07762

ATTORNEY'S DOCKET NUMBER:  
04208.0112

21. ☒ The following fees are submitted:

**BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)):**

Neither international preliminary examination fee (37 CFR 1.482)  
nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO  
and International Search Report not prepared by the EPO or JPO ..... **\$1000.00**

International preliminary examination fee (37 CFR 1.482) not paid to  
USPTO but International Search Report prepared by the EPO or JPO ..... **\$860.00**

International preliminary examination fee (37 CFR 1.482) not paid to  
USPTO but International Search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... **\$710.00**

International preliminary examination fee (37 CFR 1.482) paid to USPTO  
but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... **\$690.00**

International preliminary examination fee (37 CFR 1.482) paid to USPTO  
and all claims satisfied provisions of PCT Article 33 (1)-(4) ..... **\$100.00**

ENTER APPROPRIATE BASIC FEE AMOUNT =

CALCULATIONS PTO USE ONLY

\$860.00

Surcharge of **\$130.00** for furnishing the oath or declaration later than  
months from the earliest claimed priority date (37 CFR 1.492 (e)). ☐ 20 ☐ 30

\$

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total Claims	10	- 20 =	0	x \$18.00	\$
Independent Claims	1	- 3 =	0	x \$80.00	\$
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$270.00		\$

**TOTAL OF THE ABOVE CALCULATIONS =**

\$860.00

☐ Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.

\$

**SUBTOTAL =**

\$860.00

Processing fee of **\$130.00** for furnishing the English translation later than  
months from the earliest priority date (37 CFR 1.492(f)). ☐ 20 ☐ 30

\$

**TOTAL NATIONAL FEE =**

\$860.00

Fee for recording the enclosed assignment (37 CFR 1.21 (h)). The assignment must be accompanied by  
an appropriate cover sheet (37 CFR 3.28, 3.31). **\$40.00** per property. +

\$

**TOTAL FEES ENCLOSED =**

\$860.00

Amount to be  
refunded:

\$

charged:


\$

- a. ☒ A check in the amount of \$ 860.00 to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \$ \_\_\_\_\_ to cover the above fees.  
A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to  
Deposit Account No. 06-0916. A duplicate copy of this sheet is enclosed.
- d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card information  
should not be included on this form.** Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137 (a) or (b))  
must be filed and granted to restore the application to pending status.

**SEND ALL CORRESPONDENCE TO:**

Finnegan, Henderson, Farabow, Garrett & Dunner, L.L.P.  
1300 I Street, N.W.  
Washington, D.C. 20005-3315  
EFC/FPD/sci  
DATED: July 5, 2001

  
SIGNATURE  
Ernest F. Chapman/25961  
NAME/REGISTRATION NO.

14 / PR 75

09869784-101601  
09/869784  
JC18 Rec'd PCT/PTO 0 5 JUL 2001

## SPECIFICATION

### CARD CONNECTOR

5

#### TECHNICAL FIELD

The present invention relates to a card connector structure mounted on electronic devices, such as cellular phones, telephones, PDAs (personal digital  
10 assistants), portable audio devices and digital cameras, and more specifically to a card connector into which two kinds of cards with different thicknesses can suitably be inserted. The present invention also relates to a card connector capable of  
15 preventing the card from falling from the card connector when it is ejected.

#### BACKGROUND ART

In electronic devices such as cellular phones, telephones, PDAs and digital cameras, a variety of  
20 functions are added by inserting an IC card with a built-in memory or control IC, such as a SIM (subscriber identity module) card, an MMC (multimedia card), a Smart Media (trademark), an SD (super density  
25 or secure digital) card and a Memory Stick (trademark).

As the number of kinds of IC cards has increased in recent years, a variety of standards as to the card



off corner portion 22 at their front right corner to prevent erroneous insertion.

On the front side of the lower body portion 23 a plurality of recessed portions 24 are formed,  
5 separated from each other by a plurality of partition walls 29. In these recessed portions 24 are arranged contact pads 25 connected to an IC circuit inside the card. The depth of each recessed portion 24 is almost  
10 equal to the height of the lower body portion 23 and therefore the surface of each contact pad 25 is spaced from the front surface of the upper body portion 21 by a distance equal to the thickness a of the upper body portion 21.

The connector for removably receiving such an IC  
15 card has a plurality of contact terminals made from metal leaf springs in a connector housing. The inserted IC card is electrically connected to the electronic device, on which the connector is mounted, by these contact terminals coming into contact with  
20 the contact pads formed on the front or back surface of the inserted IC card. The contact pads of the IC card include a plurality of power supply terminals connected to power supply lines and a plurality of signal terminals for transmitting/receiving of various  
25 signals. They are connected through the contact terminals of the card connector to power supply circuits and various signal processing circuits on the

electronic device.

When considering a connector shared for receiving two kinds of IC cards with different thicknesses measured from the card surface to the card bottom surface, in this connector structure, each of these  
5 different cards is generally supported at its bottom surface by the connector housing.

In the connector housing structure that supports the bottom surface of each of these cards, however,  
10 because the cards have different thicknesses, when these cards are inserted, the distances from the contact pads of each card to the contact terminals of the connector differ.

Hence, if the elastic force (contact pressure) of  
15 the contact terminals is set to conform to a thicker card, a required contact pressure cannot be given to the contact terminals when a thinner card is inserted.

Conversely, if the contact pressure of the contact terminals is set to conform to a thinner card,  
20 when a thick card is inserted, the contact terminals deflect excessively beyond the stress limit, resulting in plastic deformations of the contact pieces.

The card connectors of this type are often equipped with an eject mechanism for extracting the  
25 card from the connector.

In this eject mechanism, an elastically displaceable braking piece is pressed against the card

to produce a friction force acting in a direction opposite that in which the card is ejected, in order to prevent the card from being pushed out rapidly and falling from the connector.

5        When considering providing a card rapid ejection prevention braking piece in a common connector that can receive two kinds of IC cards with different thicknesses, it is common practice to arrange the braking piece in said common connector so that it  
10        engages the bottom surface of each card.

         However, with the braking piece arranged to engage the bottom surface of each card, when a card with a different thickness is inserted as described above, the distance from the card bottom surface to  
15        the support surface that rigidly supports the braking piece changes.

         Hence, if the elastic displacement (contact pressure) of the braking piece is set to produce an appropriate friction force for the thick card, the  
20        contact pressure and the resulting frictional force are too small for the thin card, making it impossible to provide the card with an appropriate friction force.

         Conversely, if the elastic displacement (contact pressure) of the braking piece is set to produce an  
25        appropriate friction force for the thin card, the insertion of a thick card causes the braking piece to deflect excessively beyond the stress limit, resulting

in the braking piece being plastically deformed.

The present invention has been accomplished under these circumstances and it is an object of the present invention to solve the above-described problems by  
5 providing a card connector which can receive two kinds of cards with different thicknesses with the same contact pressures while securing a sufficient reliability of contact between the contact pads and the contact terminals.

10 Further, it is another object of the present invention to solve the above-described problems by providing a card connector which can apply appropriate braking forces to two kinds of cards with different thicknesses and thereby reliably prevent an  
15 uncontrolled rapid card ejection.

#### DISCLOSURE OF THE INVENTION

Viewed from a first aspect the present invention provides a card connector for holding either of first  
20 and second cards in a connector housing so that contact pads of the card engage contact terminals arranged in the connector housing, wherein the first card has an upper body portion, a lower body portion formed slightly narrower than the upper body portion  
25 and having recessed portions in a front side area thereof, contact pads provided in said recessed portions, and stepped portions formed along both side



edges of the card by a bottom surface of said upper body portion and a bottom surface of said lower body portion, and the second card has a card body portion having almost the same horizontal shape and thickness  
5 as the upper body portion of said first card, and contact pads arranged on a bottom surface of the card body portion at almost the same horizontal positions as the contact pads of said first card,

the card connector comprising: a pair of guide  
10 grooves formed in both side walls of the connector housing to support the side edges of the upper body portion of said first card and the side edges of the card body portion of said second card and thereby guide said first or second card as it is inserted or  
15 extracted; and side walls to define, below a space between the pair of the guide grooves, a space in which to accommodate the lower body portion of said first card.

In the case of the thin second card, the side  
20 edges of the card body portion are supported by the paired guide grooves formed in the connector housing.

In the case of the thick first card, the side edges of the upper body portion of almost the same thickness as the card body portion of the second card,  
25 i.e., the stepped portions, are supported by the paired guide grooves. Then, the lower body portion of the first card protruding downwardly from the upper

body portion through the stepped portions is accommodated in a space below a space formed between the guide grooves.

As described above, because, whichever of the  
5 first and second cards is inserted, the card is supported in the connector in such a way that the distance from the contact pads of the first card to the contact terminals of the connector is equal to the distance from the contact pads of the second card to  
10 the contact terminals, the elastic displacement (contact pressure) of the contact terminals remains the same, whichever card is inserted. This ensures a stable contact reliability for both of the cards.

A second aspect of the invention provides a card  
15 connector according to the first aspect, which further comprises: an eject mechanism to eject said card; and an elastic braking piece arranged at such a position that it engages the bottom surface of the upper body portion of said first card when said first card is  
20 inserted and engages the bottom surface of the card body portion of said second card when said second card is inserted, the braking piece applying a braking force to said first or second card when it is ejected.

In the second aspect of the invention, the  
25 elastic braking piece to apply the braking force to either of said first and second cards during the card ejection engages the bottom surface of the upper body



or displaced in excess of its stress limit.

In a further aspect of the invention, because the elastic braking piece is pressed against the equal-thickness portions of the first and second cards with  
5 different thicknesses, the same braking force can be applied to the first and second cards with different thicknesses in the card retraction direction during the card insertion process. Hence, either of the  
10 cards can be held stably and reliably, preventing the card from falling out from the connector due to unexpected external forces.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a perspective view showing an overall  
15 construction of a card connector according to a first embodiment of the invention.

Fig. 2 is a horizontal cross section showing the card connector according to the first embodiment of the invention.

20 Fig. 3 is a vertical cross section, taken along the line III-III of Fig. 1, of the card connector according to the first embodiment of the invention.

Fig. 4 is a front view of the card connector according to the first embodiment of the invention.

25 Fig. 5 is a vertical cross section similar to Fig. 3 showing the card connector according to the first embodiment of the invention with a thin card inserted.

Fig. 6 is a vertical cross section similar to Fig. 3 showing the card connector according to the first embodiment of the invention with a double-height thick card inserted.

5        Fig. 7 is a perspective view showing the card connector according to the first embodiment of the invention with a double-height thick card inserted.

Fig. 8 is a plan view showing a card connector according to a second embodiment of the invention.

10       Fig. 9 is a front view showing the card connector according to the second embodiment of the invention.

Fig. 10 is a partially cutaway plan view showing the card connector according to the second embodiment of the invention.

15       Fig. 11 is a cross section showing the card connector according to the second embodiment of the invention before the card is inserted.

Fig. 12 is a cross section showing the card connector according to the second embodiment of the invention when the thin card is inserted.

20

Fig. 13 is a cross section showing the card connector according to the second embodiment of the invention when the double-height thick card is inserted.

25       Fig. 14 is a front view showing the card connector according to the second embodiment of the invention when the double-height thick card is

inserted.

Fig. 15A and Fig. 15B are a front view and a vertical cross section, respectively, showing a card connector according to another embodiment of the invention.

Fig. 16 is a perspective view showing a thin card applied to the present invention.

Fig. 17A and Fig. 17B are a plan view and a front view, respectively, showing a thin card of Fig. 16.

Fig. 18 is a perspective view showing a double-height thick card applied to the present invention.

Figs. 19A, 19B and 19C are a plan view, a front view and a side view, respectively, showing a double-height thick card of Fig. 18.

#### BEST MODE FOR CARRYING OUT THE INVENTION

Now, embodiments of this invention will be described in detail by referring to the accompanying drawings.

#### [First Embodiment]

Fig. 1 is a perspective view showing a card connector according to the first embodiment of this invention. Fig. 2 is a horizontal cross section of the card connector. Fig. 3 is a cross section taken along the line III-III of Fig. 1. Fig. 4 is a front view of the card connector as seen from the direction of arrow B in Fig. 1.

The card connector 1 is mounted on an electronic device, such as cellular phone, PDA, portable audio device and camera.

The connector 1 shown in Fig. 1 to Fig. 4 can  
5 accommodate both a thin card 10 such as an MMC card shown in Fig. 16 and Fig. 17 and a double-height thick card 20 with step portions such as an SD card shown in Fig. 18 and Fig. 19.

In Fig. 1 to Fig. 4, the card connector 1 has a  
10 connector housing 30 roughly U-shaped when viewed from above and which is made from an insulating material such as resin and formed in one piece having side leg portions.

A base plate 31 of the connector housing 30 is  
15 formed with a plurality of press-fit grooves 32 in which a plurality of contact terminals 40 made from leaf springs are positioned and fitted under pressure. These contact terminals 40 include power supply terminals and signal terminals. Each of the contact  
20 terminals 40 has a base portion supported in the press-fit groove 32 and an elastic deformation portion extending like a cantilever beam from the base portion to above the base plate 31. The elastic deformation portion has a contact portion 40a projecting in an arc  
25 at its front end side which contacts under pressure the associated one of a plurality of contact pads 13, 25 of the card 10, 20. A terminal portion 40b formed

on the base end side of each base portion is soldered to the associated one of contact pads on a printed circuit board of the electronic device.

Each of the IC cards 10, 20 is inserted into the  
5 connector 1 through a card insertion opening 33 formed at the front of the housing 30.

The connector housing 30 has an abutment wall 35 (Fig. 3) that combines the side leg portions and against which the front end of the inserted IC card 10,  
10 20 is made to abut. At one corner where the abutment wall 35 and one of the side leg portions intersect, a corner wall 36 is formed which the cut-off corner portion 12, 22 of the inserted IC card 10, 20 engages.

The IC card 10, 20 is guided being supported its  
15 side edge portions by a pair of guide grooves 50a, 50b formed in inner side walls of the side leg portions of the housing 30 as it is inserted or retracted.

One of the guide grooves 50a extends from the card insertion opening 33 to the corner wall 36 and  
20 the other guide groove 50b extends from the card insertion opening 33 to the abutment wall 35. These guide grooves 50a, 50b are each formed by an upper wall 51, a side wall 52 and a lower wall 53 so that their opened portions face each other.

25 At the inlet portions of the guide grooves 50a, 50b the upper wall 51 is formed with a notch 37 and the side wall 52 and lower wall 53 are formed with



tapered surfaces 38, 39, respectively, to facilitate the insertion of the card 10, 20.

From the edge of the lower wall 53 of each guide groove 50a, 50b a second side wall 60 extends  
5 vertically downwardly almost at right angles to the lower wall 53. For each of the second side walls 60 a second lower wall is formed, and the upper surface of the second lower wall is flush with the upper surface of the base plate 31. Between the two parallel second  
10 side walls 60 there is formed a space 61.

Fig. 5 shows the connector 1 with the thin card 10 inserted therein. When the thin card 10 is inserted into the connector 1, the side surfaces of the card body 11 are guided by the side walls 52 of  
15 the guide grooves 50a, 50b and the side edge portions of the bottom surface of the card body 11 are guided being supported by the lower walls 53. Further, the floating of the card 10 due to the elastic force of the contact terminals 40 of the connector 1 is  
20 prevented by the side edge portions of the top surface of the card body 11 being restricted by the upper walls 51 of the guide grooves 50a, 50b.

Fig. 6 and Fig. 7 show the connector 1 with the double-height thick card 20 inserted therein.

25 When the double-height thick card 20 is inserted into the connector 1, the side surfaces of the upper body portion 21 are guided by the side walls 52 of the

guide grooves 50a, 50b and the side edge portions of the bottom surface of the upper body portion 21, i.e., the step portions 27, are supported on the lower walls 53. Further, the floating of the card 20 due to the  
 5 elastic force of the contact terminals 40 is prevented by the side edge portions of the top surface of the upper body portion 21 being restricted by the upper walls 51, as in the case with the thin card 10.

Further, the lower body portion 23 of the double-  
 10 height thick card 20 is accommodated in the space 61 between the second side walls 60. That is, the side surfaces of the lower body portion 23 of the double-height thick card 20 are guided by the second side walls 60.

15 In the thin card 10, as shown in Fig. 16 and Fig. 17, the contact pads 13 are on the bottom surface of the card body 11.

In the double-height thick card 20, on the other hand, the contact pads 25 as shown in Fig. 18 and Fig.  
 20 19 are on the bottom surface of the upper body portion 21, i.e., in the recessed portions 24 formed in the lower body portion 23.

The connector structure described above supports the inserted card in the direction of height as  
 25 follows. The thin card 10 is supported at its bottom surface by the lower walls 53 of the guide grooves 50a, 50b, and the double-height thick card 20 is supported

at the bottom surface of its upper body portion 21 similarly by the lower walls 53 of the guide grooves 50a, 50b.

In this connector structure, therefore, whichever  
 5 of the cards 10 and 20 is inserted, the distance from the contact pads 13 or 25 to the contact terminals 40 of the connector remains unchanged, so that the contact terminals are given the same elastic displacement, whichever card 10 or 20 is inserted.  
 10 Hence, the both cards 10, 20 are given almost the same contact pressures and therefore stable contact reliability.

In the connector structure above, the positioning in the lateral direction of the double-height thick  
 15 card 20 with respect to the connector 1 can be realized either by the side walls 52, which form the guide grooves 50a, 50b, or by the second side walls 60 below. When a dimensional difference between the horizontal shapes of the thin card 10 and the upper  
 20 body portion 21 of the double-height thick card 20 is small, the lateral positioning of the double-height thick card 20 may be done by the upper side walls 52. When the dimensional difference is large, the lateral positioning of the double-height thick card 20 may be  
 25 done by the lower second side walls 60.

[Second Embodiment]

Next, the second embodiment of the present

invention will be described by referring to Fig. 8 to Fig. 14.

Fig. 8 is a plan view showing a card connector according to the second embodiment of this invention.

5 Fig. 9 is a front view of the card connector as seen from a direction of arrow B in Fig. 8. Fig. 10 is a partly cutaway plan view of the card connector.

The connector 1 shown in Fig. 8 to Fig. 10 can accommodate both a thin card 10 such as an MMC shown  
10 in Fig. 16 and Fig. 17 and a double-height thick card 20 with step portions such as an SD card shown in Fig. 18 and Fig. 19. Components with the same functions as those of the first embodiment are assigned like  
15 reference numbers to facilitate the understanding of the second embodiment.

In Fig. 8 to Fig. 10, a base plate 31 of the connector housing 30 is formed with a plurality of press-fit grooves 32 in which a plurality of contact terminals 40 made from contact leaf springs are fitted  
20 under pressure. The contact terminals 40 are each supported like a cantilevered beam and have a contact portion 40a projecting at the front end side thereof so that the contact portions 40a come into pressure contact with a plurality of contact pads 13, 25 of the  
25 card 10, 20. Terminal portions 40b formed on the base end side of the contact terminals 40 are soldered to contact pads of a printed circuit board of an

electronic device.

These contact terminals 40 make electrical connection between the card 10, 20 and the electronic device and at the same time provide an appropriate  
 5 card holding force by their elastic force when the card is inserted.

The IC card 10, 20 is inserted into the connector 1 through a card insertion opening 33 formed at the front of the housing 30.

10 The connector housing 30 is formed with an abutment wall 35 which the inserted IC card 10, 20 engages. At one corner of the abutment wall 35 there is formed a protruding corner wall 36 which the cut-off corner portion 12, 22 of the IC card 10, 20  
 15 engages.

In one side portion of the connector housing 30 a lever holding portion 3 is formed outside the guide groove 50a to slidably guide an eject lever 2 between an initial position and an eject position in the  
 20 direction of card insertion and extraction. The lever holding portion 3 encloses the eject lever 2 in three or four directions.

In the housing 30 on the far side of the abutment wall 35 there is a cam lever accommodating portion 5  
 25 in which a cam lever 4 is installed. The cam lever 4 is mounted to be rotatable about a shaft 6 in a plane parallel to the surface of the base plate 31 of the

housing 30. One end of the cam lever 4 can engage a front end 2a of the eject lever 2 and the other end can engage the front end wall of the card 10 or 20.

5 The eject lever 2 and cam lever 4 form an eject mechanism for ejecting the card 10, 20.

When the card 10, 20 is inserted into the connector 1, the front end wall of the card 10, 20 pushes one end of the cam lever 4 which is then rotated to a position indicated by a dashed line in  
10 Fig. 8. This causes the other end of the cam lever 4 to push the front end 2a of the eject lever 2, retracting the eject lever 2.

When, with the card inserted, the eject lever 2 is pushed forwardly, the front end 2a of the eject  
15 lever 2 presses one end of the cam lever 4, rotating the cam lever 4 to a position indicated by a two-dot chain line in Fig. 8. As a result of this rotation, the other end of the cam lever 4 pushes the front end wall of the card 10, 20, causing the card to be  
20 ejected.

The IC card 10, 20 is guided being supported its side edges portion by a pair of guide grooves 50a, 50b formed in inner side walls of the housing 30 as it is inserted or extracted.

25 One of the guide grooves 50a extends from the card insertion opening 33 to the corner wall 36 and the other guide groove 50b extends from the card

insertion opening 33 to the abutment wall 35.

These guide grooves 50a, 50b are each formed by an upper wall 51, a side wall 52 and a lower wall 53. From the edge of the lower wall 53 of each guide  
5 groove 50a, 50b a second side wall 60 extends downwardly.

Further, as shown in Fig. 10 and Fig. 11, a braking piece 7 made from an elastic leaf spring is installed in a part of the guide groove 50a on the far  
10 side thereof. The braking piece 7 applies a braking force to the card 10, 20 as the card is ejected.

The braking piece 7 has a stationary portion 7a secured to a braking piece support surface 70, a leaf spring portion 7b extending in the direction of card  
15 insertion and extraction, and a front engagement portion 7c projecting in an arc to engage the bottom surface of the card 10, 20. With the stationary portion 7a rigidly fixed, the braking piece 7 is supported like a cantilevered beam. Below the front  
20 engagement portion 7c of the braking piece 7, the housing 30 has an opening 71 to allow the front engagement portion 7c to escape downwardly. To apply the braking force to the card 10, 20 effectively as it is ejected, the far side of the braking piece 7 is  
25 rigidly secured and the front end is set free.

The braking piece support surface 70, to which the braking piece 7 is secured, is formed at a

position a predetermined distance lower than the lower wall 53 of the guide groove 50a so that when the braking piece 7 is elastically deformed by the pressing force of the card, the braking piece 7 can  
5 secure a predetermined projection height. The width of the leaf spring portion 7b and the front engagement portion 7c of the braking piece 7 is set almost equal to the width of the bottom surface of the edge portion of the upper body portion 21 of the double-height  
10 thick card 20, i.e., the width of the step portion 27.

Fig. 12 shows the state of the connector 1 with the thin card 10 inserted therein.

When the thin card 10 is inserted into the connector 1, the side surfaces of the card body 11 are  
15 guided by the side walls 52 of the guide grooves 50a, 50b and the side edge portions of the bottom surface of the card body 11 are supported by the lower walls 53. Further, the side edge portions of the top surface of the card body 11 are restricted by the  
20 upper walls 51 to prevent the card 10 from being floated by the elastic force of the contact terminals 40 of the connector 1.

Further, when the thin card 10 is inserted, the front engagement portion 7c of the braking piece 7 is  
25 pressed down by the side edge portion of the bottom surface of the card 10, elastically deforming the braking piece 7 downward. Hence, with the card 10



inserted, the pressing load of the braking piece 7 is applied to the bottom surface of the card 10, so that when the card is ejected by the eject mechanism, the card can be applied a braking force.

5 Fig. 13 and Fig. 14 show the state of the connector 1 when the double-height thick card 20 is inserted.

When the double-height thick card 20 is inserted into the connector 1, the side surfaces of the upper  
10 body portion 21 of the card 20 are guided by the side walls 52 of the guide grooves 50a, 50b and the side edge portions of the bottom surface of the upper body portion 21, i.e., the step portions 27, are supported by the lower walls 53. Further, the side edge  
15 portions of the top surface of the upper body portion 21 are restricted by the upper walls 51 to prevent the card 20 from being floated by the elastic force of the contact terminals 40. The lower body portion 23 of the double-height thick card 20 is accommodated in the  
20 housing space between the second side walls 60.

Further, when the double-height thick card 20 is inserted, the front engagement portion 7c of the braking piece 7 is pressed down by the side edge  
portion of the bottom surface of the upper body  
25 portion 21 of the card 20, i.e., by the step portion 27, elastically deforming the braking piece 7 downwardly. Hence, with the card 20 inserted, the

pressing load of the braking piece 7 is applied to the step portion 27 of the card 20 so that when the card 20 is ejected, an appropriate braking force can be applied to the card.

5        In the connector structure above, because the braking piece 7 is so arranged that it presses, from below, against equal-thickness portions of the two different-thickness cards 10, 20, the braking piece 7 is displaced by the same distance, whichever of the  
10   two cards 10, 20 is inserted. This means that the contact pressures produced by the braking piece 7 engaging the card 10 and the card 20 are virtually equal. Therefore, when the card is ejected by the eject mechanism, the frictional resistances applied by  
15   the elastic force of the braking piece 7 to the two cards 10, 20 are equal, thus assuring stable ejection operations for the two cards. Further, the braking piece 7 also functions as a braking means to prevent the card from falling from the connector due to  
20   unexpected external forces when the card is being inserted. The braking piece 7 can therefore ensure more stable holding of the card.

[Another Embodiment]

Fig. 15A and Fig. 15B show another embodiment of  
25   this invention. In this embodiment an opening width W1 of a top plate 55 forming the upper walls 51 of the guide grooves 50a, 50b of the connector housing 30 is

set larger than a width  $W2$  of the bottom surface of the lower body portion 23 of the double-height thick card 20 and smaller than a width  $W3$  of the upper body portion 21 (see Fig. 15A and Fig. 15B; Figs. 15A and 5 15B show the state in which the double-height thick card 20 is inserted upside down).

Hence, in this construction, if the double-height thick card 20 is erroneously inserted upside down, the upper body portion 21 is guided by the guide grooves 10 50a, 50b with the lower body portion 23 of the double-height thick card 20 received in the opening of the width  $W1$  formed in the top plate 55. As a result, the elastic displacement of the braking piece 7 when the double-height thick card 20 is erroneously inserted 15 upside down and the elastic displacement when the card is inserted normally are equal. Hence, even when the double-height thick card 20 is wrongly inserted, the braking piece 7 is not displaced in excess of its stress limit and can reliably be protected against 20 being plastically deformed.

Although, in the embodiments described above, the braking piece 7 of the present invention is applied the card connector having an eject mechanism, the braking piece 7 of this invention may also be applied 25 to card connectors with no eject mechanism. That is, in this kind of connectors the falling of the card is prevented basically by the pressing force of a



the present invention can be applied to any other kind of IC card.

#### INDUSTRIAL APPLICABILITY

5        With this invention, because the card is supported in the connector in such a manner that no matter which of the two cards with different thicknesses is inserted, the distance from the contact pads of the card to the contact terminals of the  
10 connector remains the same, the contact terminals are given the same elastic displacements by whichever card is inserted. Hence, the both cards can secure stable contact reliability.

      Because the elastic braking piece is pressed  
15 against the equal-thickness portions of the first and second cards with different thicknesses, the displacement of the elastic braking piece remains the same, whichever of the first and second cards is inserted. Hence, the frictional resistance of the  
20 braking piece applied to the card when the card is ejected remains the same for the first and second cards, thus preventing both of these cards from rapidly coming out and falling from the connector, realizing a stable ejection operation.

25        Further, in this invention, if the double-height thick card is erroneously inserted upside down, the lower body portion of the double-height thick card can

escape upward through the opening or recess formed in the housing top plate, making it possible to give the braking piece the same elastic displacement as during the normal insertion and thereby prevent the braking  
5 piece from being deformed or displaced in excess of its stress limit.

Further, in this invention, because the elastic braking piece applies a braking force to the card in the card extraction direction when the card is inserted,  
10 the card can be held stably and reliably, preventing the card from falling out from the connector due to unexpected external forces.

CLAIMS:

1. A card connector for holding either of first and second cards in a connector housing so that contact  
5 pads of the card engage contact terminals arranged in the connector housing,

wherein the first card has an upper body portion, a lower body portion formed slightly narrower than the upper body portion and having recessed portions in a  
10 front side area thereof, contact pads provided in said recessed portions, and stepped portions formed along both side edges of the card by a bottom surface of said upper body portion and a bottom surface of said lower body portion, and

15 the second card has a card body portion having almost the same horizontal shape and thickness as the upper body portion of the first card, and contact pads arranged on a bottom surface of the card body portion at almost the same horizontal positions as the contact  
20 pads of the first card,

the card connector comprising:

a pair of guide grooves formed in both side walls of the connector housing to support the side edges of the upper body portion of the first card and the side  
25 edges of the card body portion of the second card and thereby guide the first or second card as it is inserted or extracted; and

side walls to define, below a space between the pair of the guide grooves, a space in which to accommodate the lower body portion of the first card.

- 5    2.    A card connector according to claim 1, wherein said side walls are formed at such locations that they can guide the side surfaces of the lower body portion of the first card.
- 10   3.    A card connector according to claim 1, further comprising:  
        an eject mechanism to eject the card; and  
        an elastic braking piece arranged at such a position that it engages the bottom surface of the  
15    upper body portion of the first card when the first card is inserted and engages the bottom surface of the card body portion of the second card when the second card is inserted, the braking piece applying a braking force to the first or second card when it is ejected.
- 20   4.    A card connector according to claim 3, wherein said elastic braking piece is secured to a position which is in a far part of said guide groove and which is a predetermined distance lower than a lower wall of  
25    said guide groove.
5.    A card connector according to claim 1, wherein a



housing top plate that forms upper walls of said guide grooves is formed with an opening having a width larger than that of the lower body portion of said first card.

5

6. A card connector according to claim 1, wherein a housing top plate that forms upper walls of said guide grooves is formed with a recess having a width larger than that of the lower body portion of said first card and receding in the height direction.

10

7. A card connector according to claim 1, further comprising:

an elastic braking piece arranged at such a position that it engages the bottom surface of the upper body portion of said first card when said first card is inserted and engages the bottom surface of the card body portion of said second card when said second card is inserted, the braking piece applying a braking force to said first or second card in a card extraction direction.

20

8. A card connector according to claim 7, wherein said elastic braking piece is secured to a position which is in a far part of said guide groove and which is a predetermined distance lower than a lower wall of said guide groove.

25



## ABSTRACT

The connector housing 30 is formed with a pair of guide grooves 50a, 50b and a pair of side walls 60.

5 The guide grooves 50a, 50b support the both side edges of the upper body portion 21 of the thick first card 20 and also the both side edges of the card body 11 of the thin second card 10 and guide these cards as they are inserted or extracted. The side walls 60 define,

10 below a space between the paired guide grooves 50a, 50b, a space in which to accommodate the lower body portion 23 of the first card 20. This construction ensures that, whichever of the first and second cards is inserted, the elastic displacements of the contact

15 terminals 40 of a card connector 1 remain the same, allowing the card to be electrically connected stably.

1/14

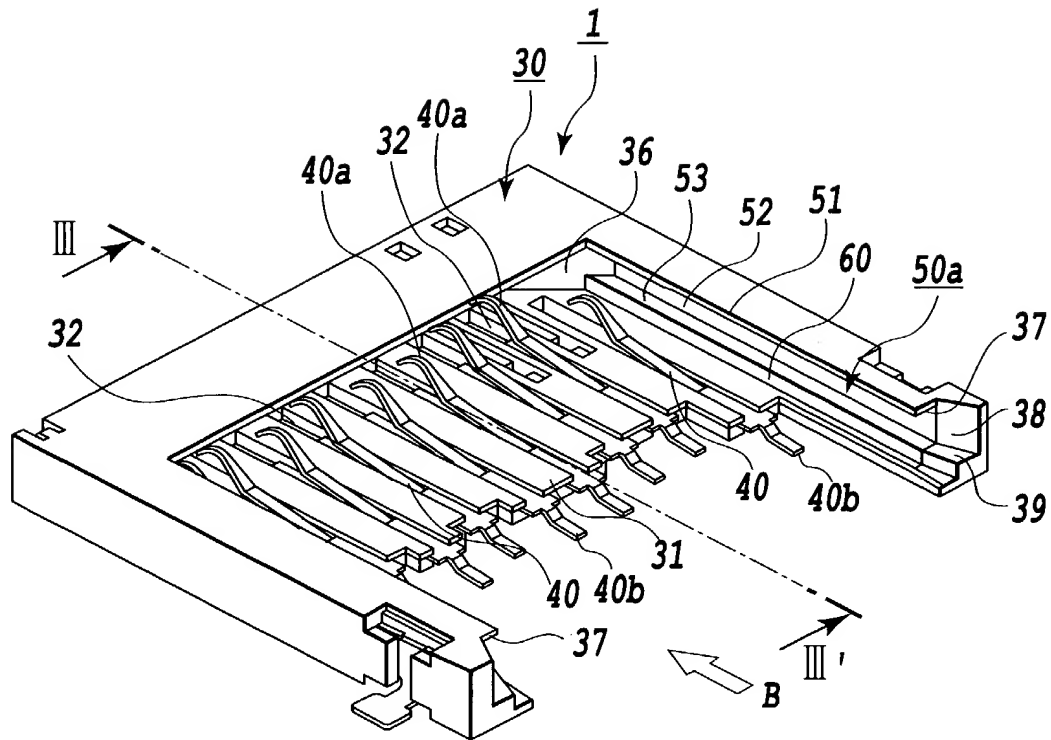
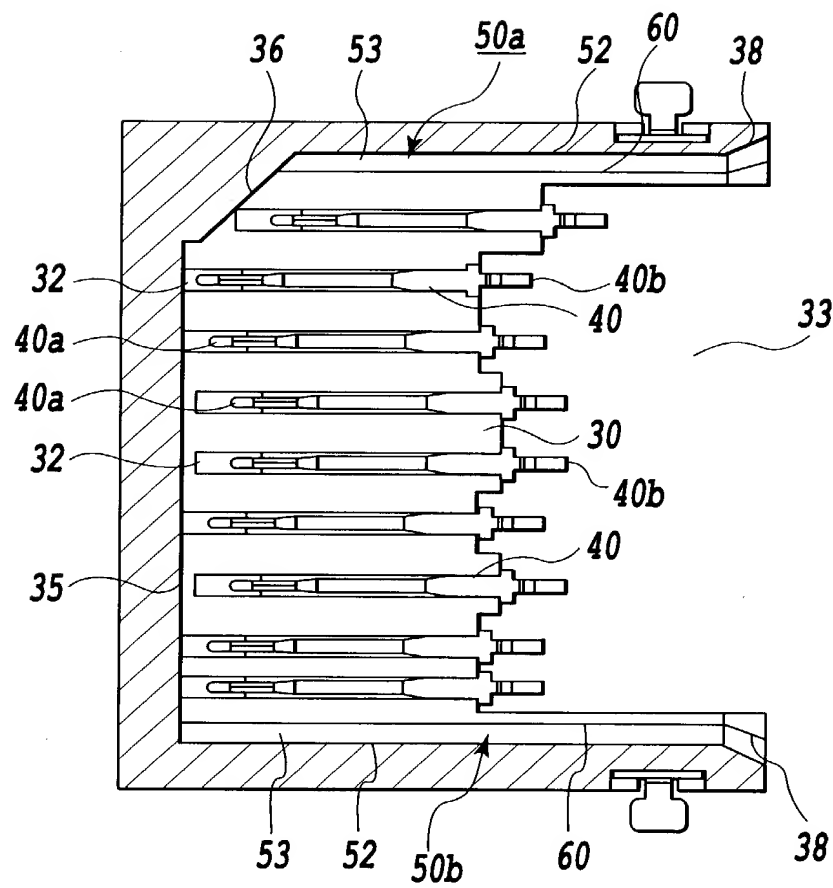


FIG.1



**FIG.2**

3/14

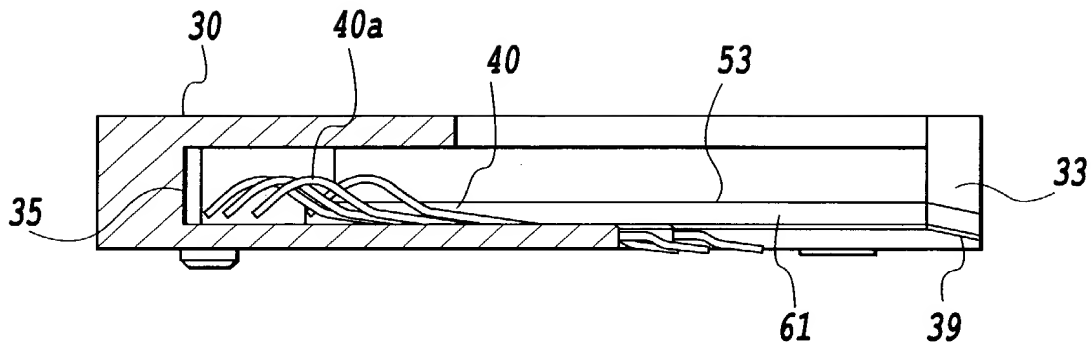


FIG.3

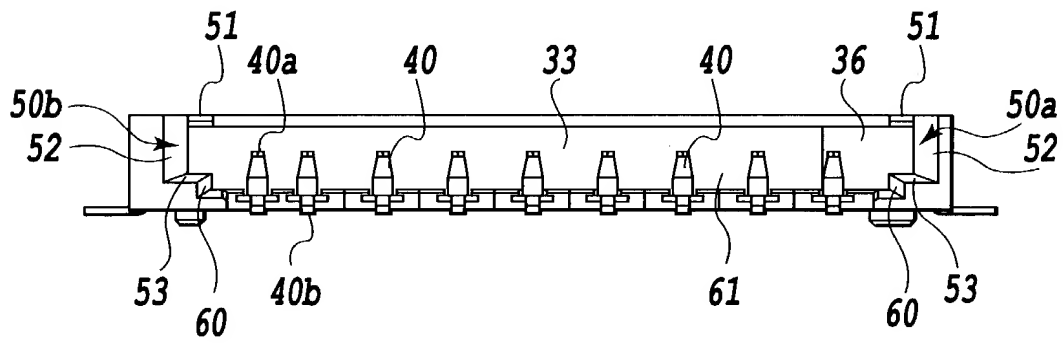


FIG.4

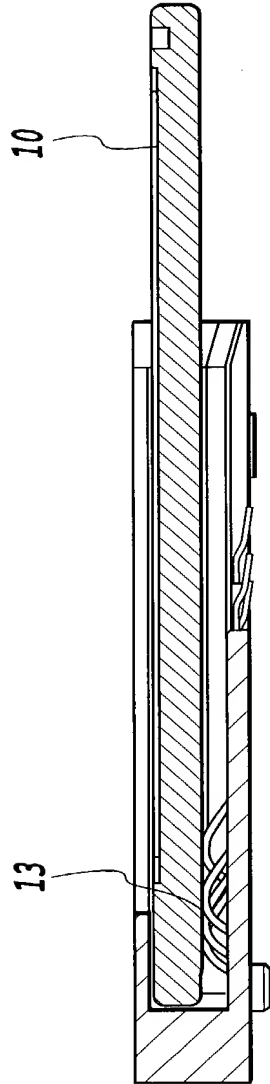


FIG.5

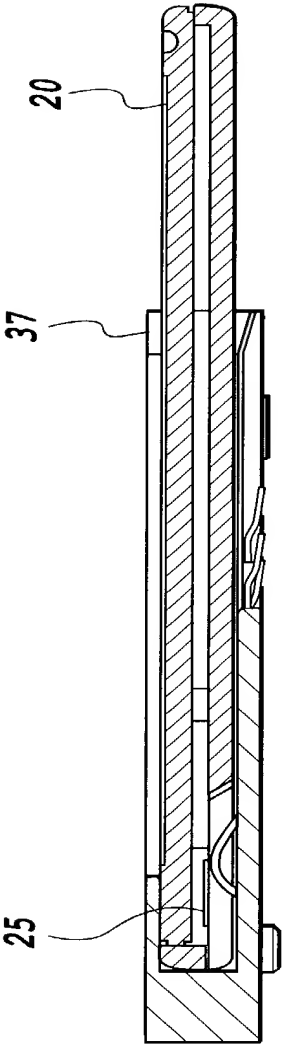


FIG.6



6/14

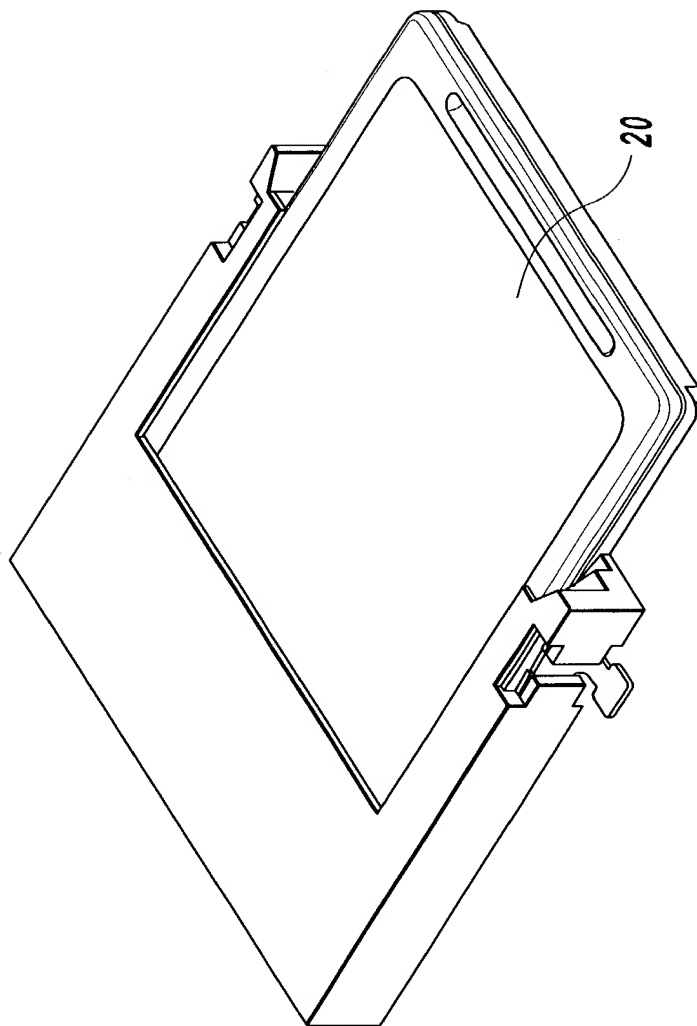


FIG. 7

7/14

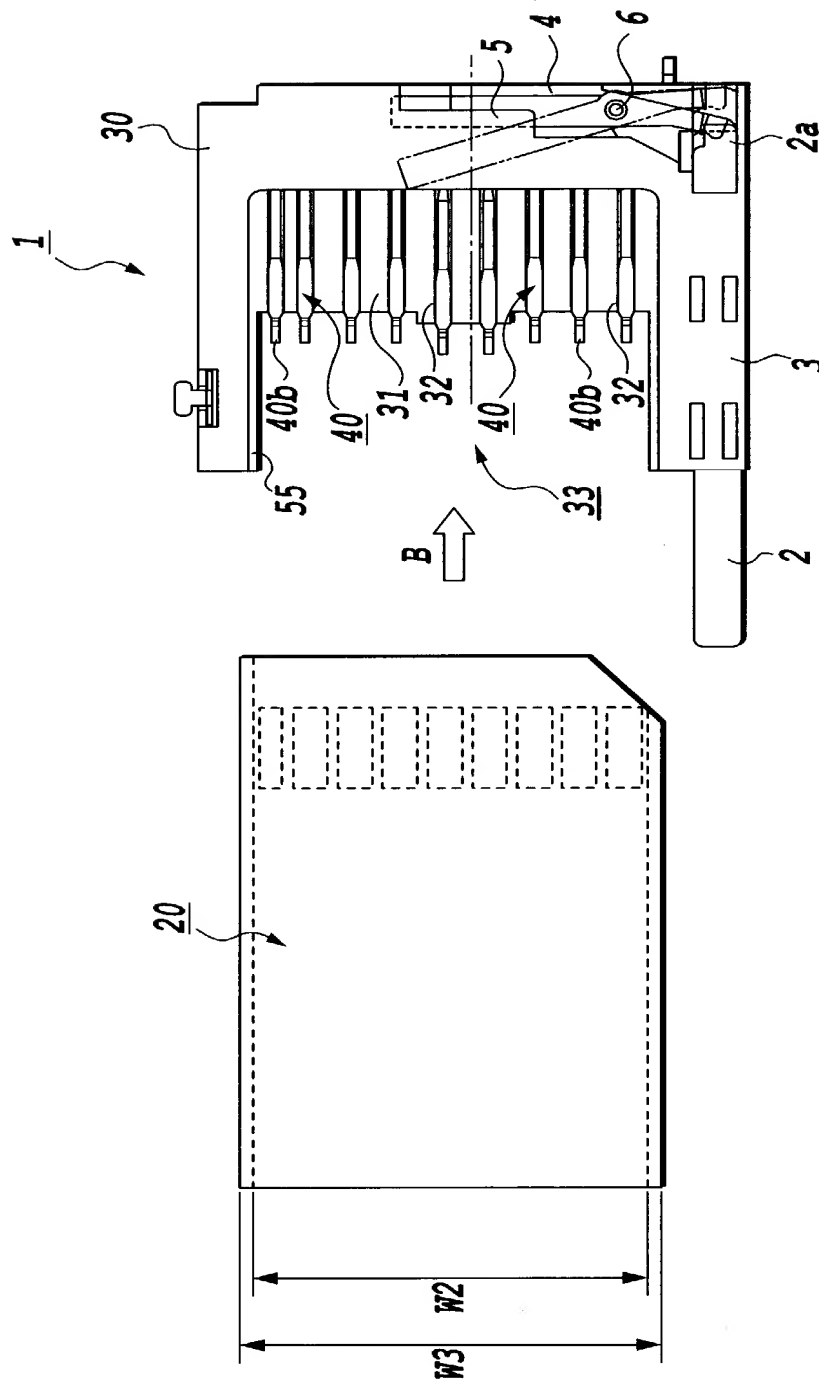


FIG. 8

8/14

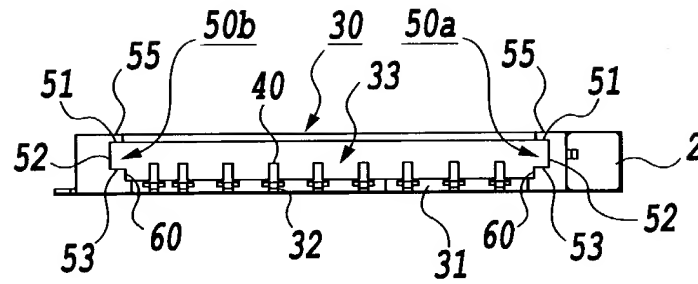


FIG. 9

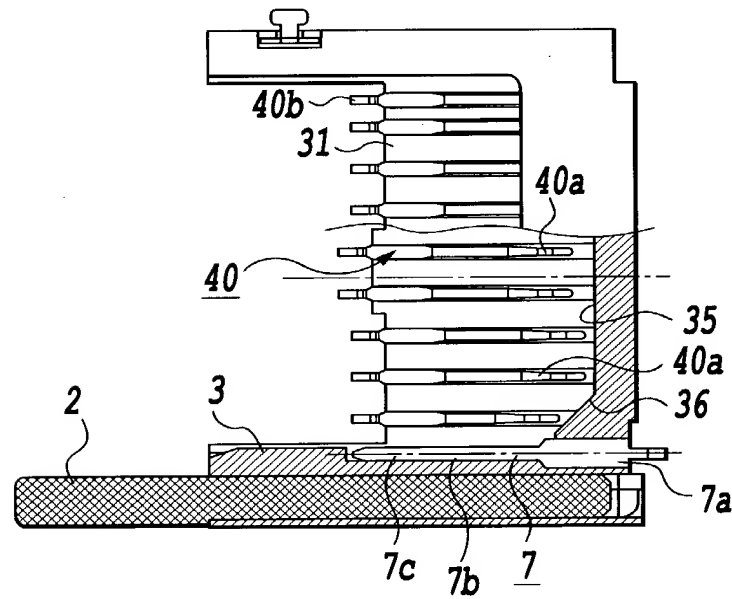


FIG. 10

9/14

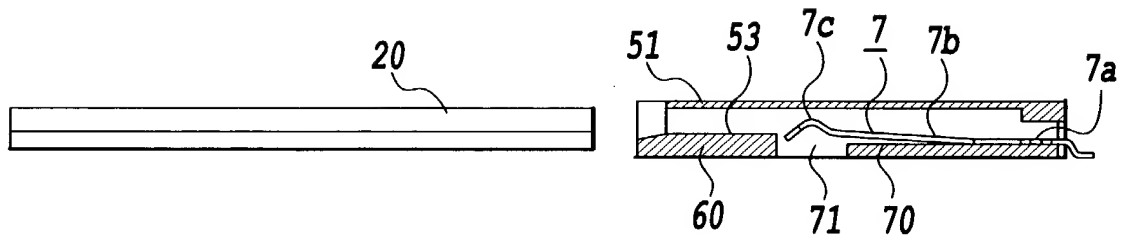


FIG.11

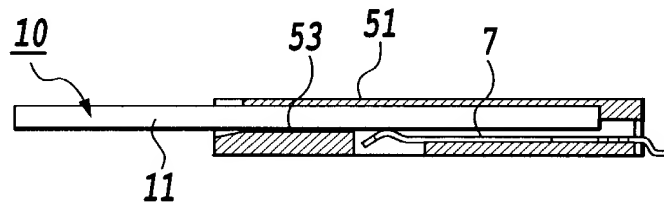


FIG.12

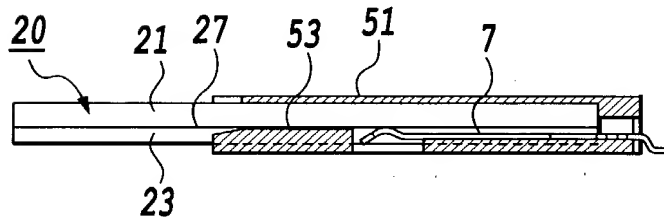


FIG.13

10/14

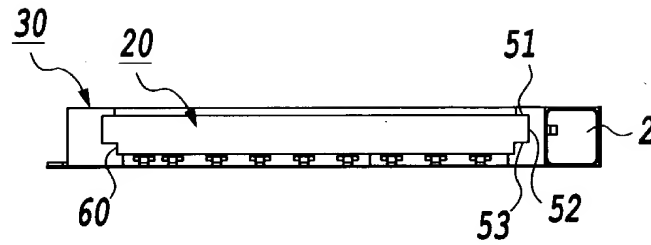


FIG. 14

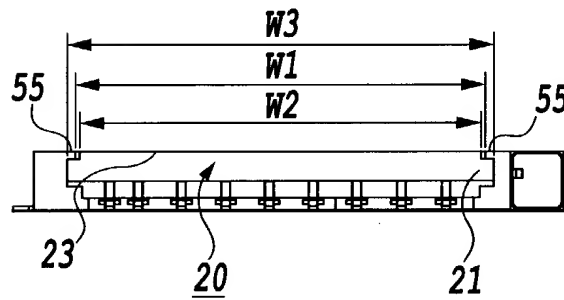


FIG. 15A

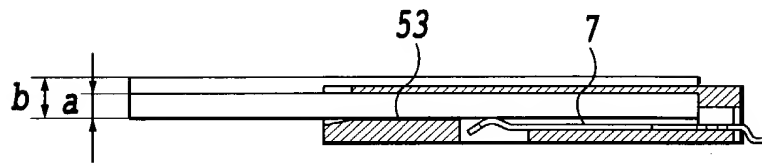


FIG. 15B

11/14

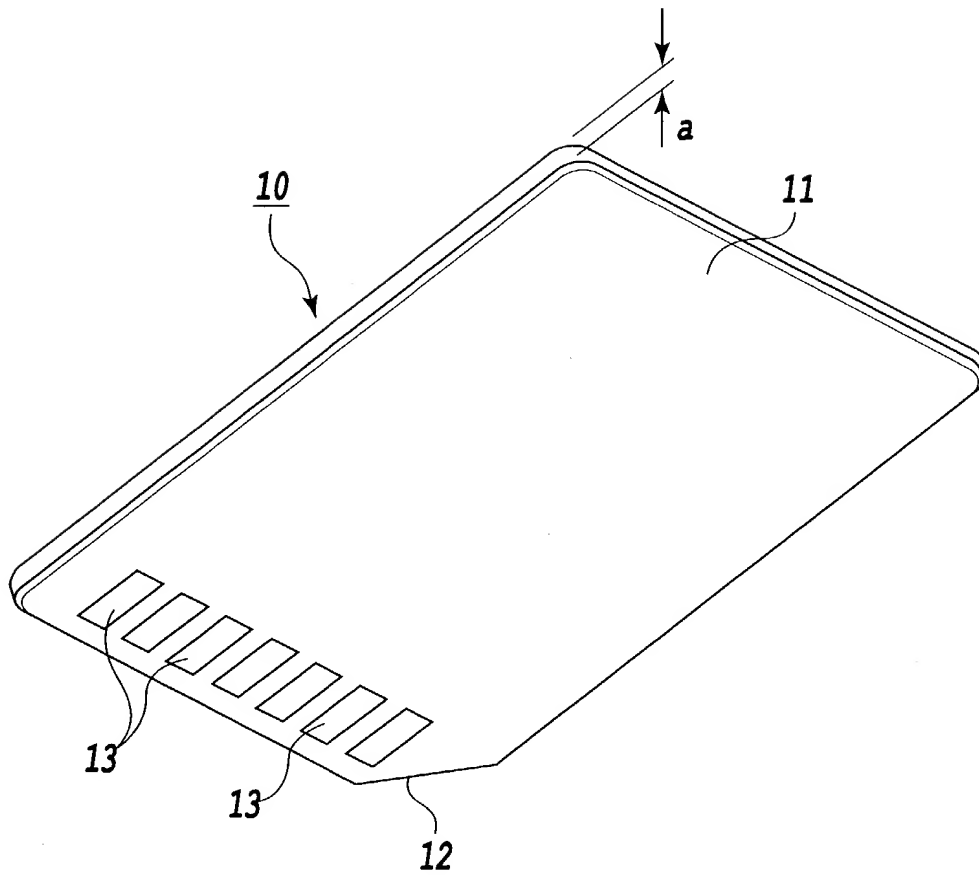


FIG.16

12/14


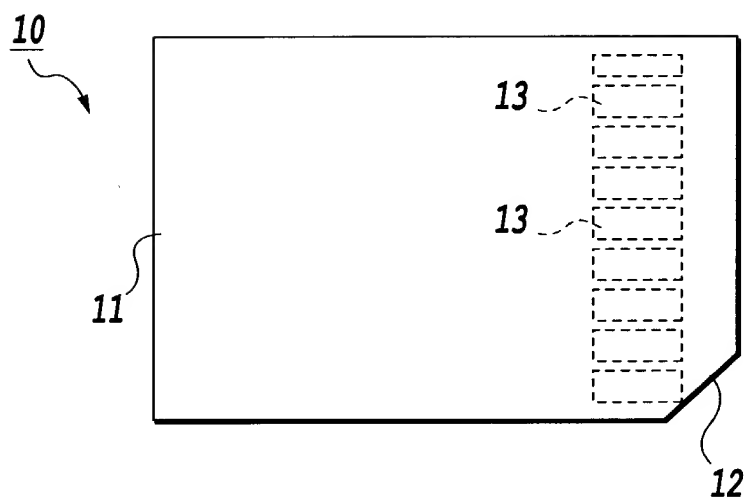


FIG.17A

FIG.17B

13/14

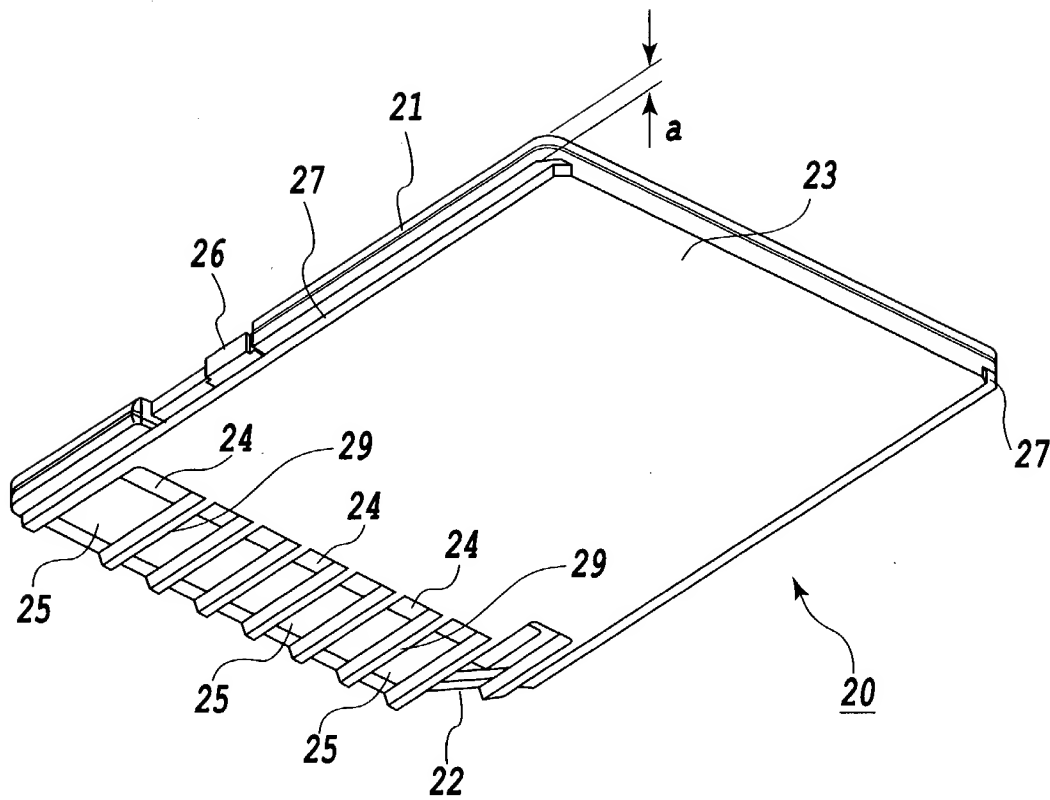


FIG.18



14/14

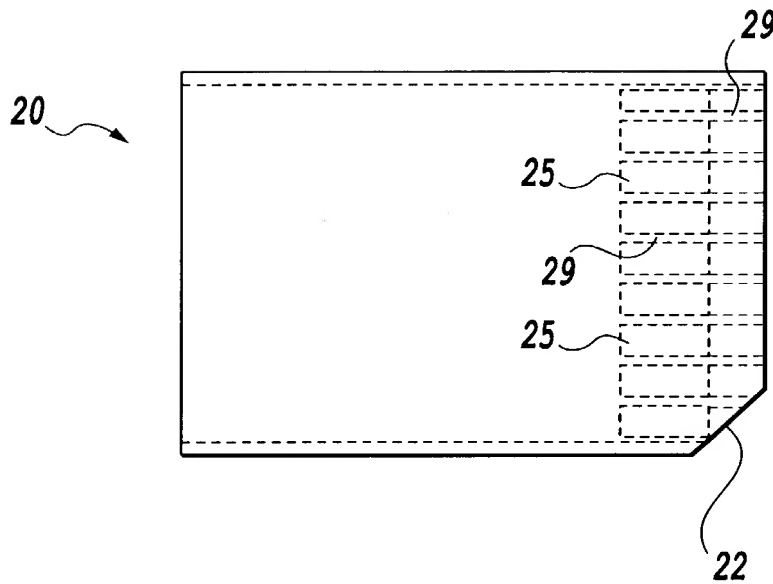


FIG. 19A

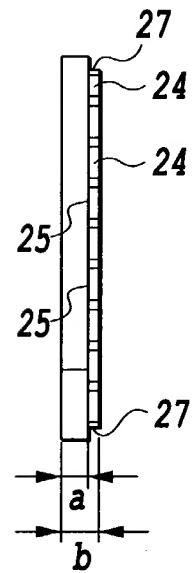


FIG. 19B

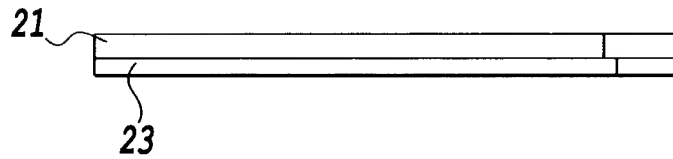


FIG. 19C

Attorney Docket No. \_\_\_\_\_

**DECLARATION AND POWER OF ATTORNEY**

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: CARD CONNECTOR

the specification of which ☐ is attached and/or ☐ was filed on \_\_\_\_\_ as United States Application Serial No. \_\_\_\_\_ or PCT International Application No. PCT/JP00/07762 and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate or § 365(a) of any PCT International application(s) designating at least one country other than the United States, listed below and have also identified below, any foreign application(s) for patent or inventor's certificate, or any PCT International application(s) having a filing date before that of the application(s) of which priority is claimed:

Country	Application Number	Date of Filing	Priority Claimed Under 35 U.S.C. 119
Japan	11-316110	November 5, 1999	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO
Japan	11-323187	November 12, 1999	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:

Application Number	Date of Filing

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) or § 365(c) of any PCT International application(s) designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application(s) in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application(s) and the national or PCT International filing date of this application:

Application Number	Date of Filing	Status (Patented, Pending, Abandoned)
PCT/JP00/07762	November 2, 2000	Pending

I hereby appoint the following attorney and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P., Reg. No. 22,540; Douglas B. Henderson, Reg. No. 20,291; Ford F. Farabow, Jr., Reg. No. 20,630; Arthur S. Garrett, Reg. No. 20,338; Donald R. Dunner, Reg. No. 19,073; Brian G. Brunsvold, Reg. No. 22,593; Tipton D. Jennings, IV, Reg. No. 20,645; Jerry D. Voight, Reg. No. 23,020; Laurence R. Hefter, Reg. No. 20,827; Kenneth E. Payne, Reg. No. 23,098; Herbert H. Mintz, Reg. No. 26,691; C. Larry O'Rourke, Reg. No. 26,014; Albert J. Santorelli, Reg. No. 22,610; Michael C. Elmer, Reg. No. 25,857; Richard H. Smith, Reg. No. 20,609; Stephen L. Peterson, Reg. No. 26,325; John M. Romary, Reg. No. 26,331; Bruce C. Zotter, Reg. No. 27,680; Dennis P. O'Reilly, Reg. No. 27,932; Allen M. Sokal, Reg. No. 26,695; Robert D. Bajefsky, Reg. No. 25,387; Richard L. Stroup, Reg. No. 28,478; David W. Hill, Reg. No. 28,220; Thomas L. Irving, Reg. No. 28,619; Charles E. Lipsey, Reg. No. 28,165; Thomas W. Winland, Reg. No. 27,605; Basil J. Lewis, Reg. No. 28,818; Martin I. Fuchs, Reg. No. 28,508; E. Robert Yoches, Reg. No. 30,120; Barry W. Graham, Reg. No. 29,924; Susan Haberman Griffen, Reg. No. 30,907; Richard B. Racine, Reg. No. 30,415; Thomas H. Jenkins, Reg. No. 30,857; Robert E. Converse, Jr., Reg. No. 27,432; Clair X. Mullen, Jr., Reg. No. 20,348; Christopher P. Foley, Reg. No. 31,354; John C. Paul, Reg. No. 30,413; Roger D. Taylor, Reg. No. 28,992; David M. Kelly, Reg. No. 30,953; Kenneth J. Meyers, Reg. No. 25,146; Carol P. Einaudi, Reg. No. 32,220; Walter Y. Boyd, Jr., Reg. No. 31,738; Steven M. Anzalone, Reg. No. 32,095; Jean B. Fordis, Reg. No. 32,984; Barbara C. McCurdy, Reg. No. 32,120; James K. Hammond, Reg. No. 31,964; Richard V. Burgujian, Reg. No. 31,744; J. Michael Jakes, Reg. No. 32,824; Dirk D. Thomas, Reg. No. 32,600; Thomas W. Banks, Reg. No. 32,719; Christopher P. Isaac, Reg. No. 32,616; Bryan C. Diner, Reg. No. 32,409; M. Paul Barker, Reg. No. 32,013; Andrew Chanho Sonu, Reg. No. 33,457; David S. Forman, Reg. No. 33,694; Vincent P. Kovalick, Reg. No. 32,867; and \_\_\_\_\_ Please address all correspondence to FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P. 1300 I Street, N.W., Washington, D.C. 20005, Telephone No. (202) 408-4000.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full Name of First Inventor	<u>Toshiyasu ITO</u>	Inventor's Signature	<u>[Signature]</u>	Date	<u>July 3, 2001</u>
Residence	<u>504-20, Daikata, Togane-shi, Chiba 283-0811, Japan</u>			Citizenship	<u>Japan</u>
Post Office Address	<u>504-20, Daikata, Togane-shi, Chiba 283-0811, Japan</u>				

Listing of Inventors Continued on Page 2 hereof. ☒ Yes ☐ No

Listing of Inventors Continued From Page 1 hereof.

Attorney Docket No. \_\_\_\_\_

20	Full Name of Second Inventor <u>Masaaki OYA</u>	Inventor's Signature <u>Masaaki OYA</u>	Date July 3, 2001
	Residence 19-23, Higashiterao 3-chome, Tsurumi-ku, Yokohama-shi, Kanagawa 230-0077, Japan <u>JPX</u>		Citizenship Japan
	Post Office Address 19-23, Higashiterao 3-chome, Tsurumi-ku, Yokohama-shi, Kanagawa 230-0077, Japan		
30	Full Name of Third Inventor <u>Kazutaka TAGUCHI</u>	Inventor's Signature <u>Kazutaka TAGUCHI</u>	Date July 3, 2001
	Residence 38-48-201, Honcho 1-chome, Asaka-shi, Saitama 351-0011, Japan <u>JPX</u>		Citizenship Japan
	Post Office Address 38-48-201, Honcho 1-chome, Asaka-shi, Saitama 351-0011, Japan		
40	Full Name of Fourth Inventor <u>Takashi TORII</u>	Inventor's Signature <u>Takashi Torii</u>	Date July 6, 2001
	Residence 2-2-605, Sekime 4-chome, Johto-ku, Osaka-shi, Osaka 536-0008, Japan <u>JPX</u>		Citizenship Japan
	Post Office Address 2-2-605, Sekime 4-chome, Johto-ku, Osaka-shi, Osaka 536-0008, Japan		
50	Full Name of Fifth Inventor <u>Hideki KAWAI</u>	Inventor's Signature <u>Hideki Kawai</u>	Date July 6, 2001
	Residence 6-3-202, Sakyo 3-chome, Nara-shi, Nara 631-0801, Japan <u>JPX</u>		Citizenship Japan
	Post Office Address 6-3-202, Sakyo 3-chome, Nara-shi, Nara 631-0801, Japan		
	Full Name of Sixth Inventor	Inventor's Signature	Date
	Residence		Citizenship
	Post Office Address		
	Full Name of Seventh Inventor	Inventor's Signature	Date
	Residence		Citizenship
	Post Office Address		
	Full Name of Eighth Inventor	Inventor's Signature	Date
	Residence		Citizenship
	Post Office Address		
	Full Name of Ninth Inventor	Inventor's Signature	Date
	Residence		Citizenship
	Post Office Address		
	Full Name of Tenth Inventor	Inventor's Signature	Date
	Residence		Citizenship
	Post Office Address		